



BLULINE



SHEAR&BALER **CAT**



**“... IF THE SCRAP DOESN'T GO TO THE SHEAR
...THE SHEAR GOES TO THE SCRAP”**

“CAT” shear&baler that adapts to your working method. You will decide, wherever you want it to work, it will follow you. It's not a new idea, it's just a brilliant idea. The supporting structure can be equipped with 4 cylinders to ensure stability and ground alignment. In addition, the cylinders allow the shear&baler to be lifted, allowing loading and unloading from the means of transport, whether it is a tracked vehicle or a swan-neck semi-trailer. “CAT” can work directly on the ground. “CAT” series shears&balers are composed of a single monolithic self-supporting structure. The “CAT” shear is equipped with the original TAURUS “SWINGING WING” system with OVERSTROKE on BOTH WINGS SBxc (patented).

TAURUS

Via Cesare Battisti 77
21020 Daverio (VA-IT)



T. +39 0332947242
info@taurusweb.it
www.taurusweb.it




BLULINE

highlights

SHEAR&BALER CAT

CAT		C662	C762	C873	C973
Cutting force	tons	600	700	800	900
Clamp		◆	◆	◆	◆
Bale dimension	mm	880x600	880x600	880x600	880x600
Open box width	mm	2800	2800	2800	2800
Box length	mm	6100	6100	7200	7200
Cylinder per wing	n.	2	2	3	3
Max. compression force (each wing)	tons	300	300	450	450
Main cylinder compression force	tons	150	150	150	150
Diesel engine	hp	280	280	500	500
Indicative weight	tons	90	95	115	120

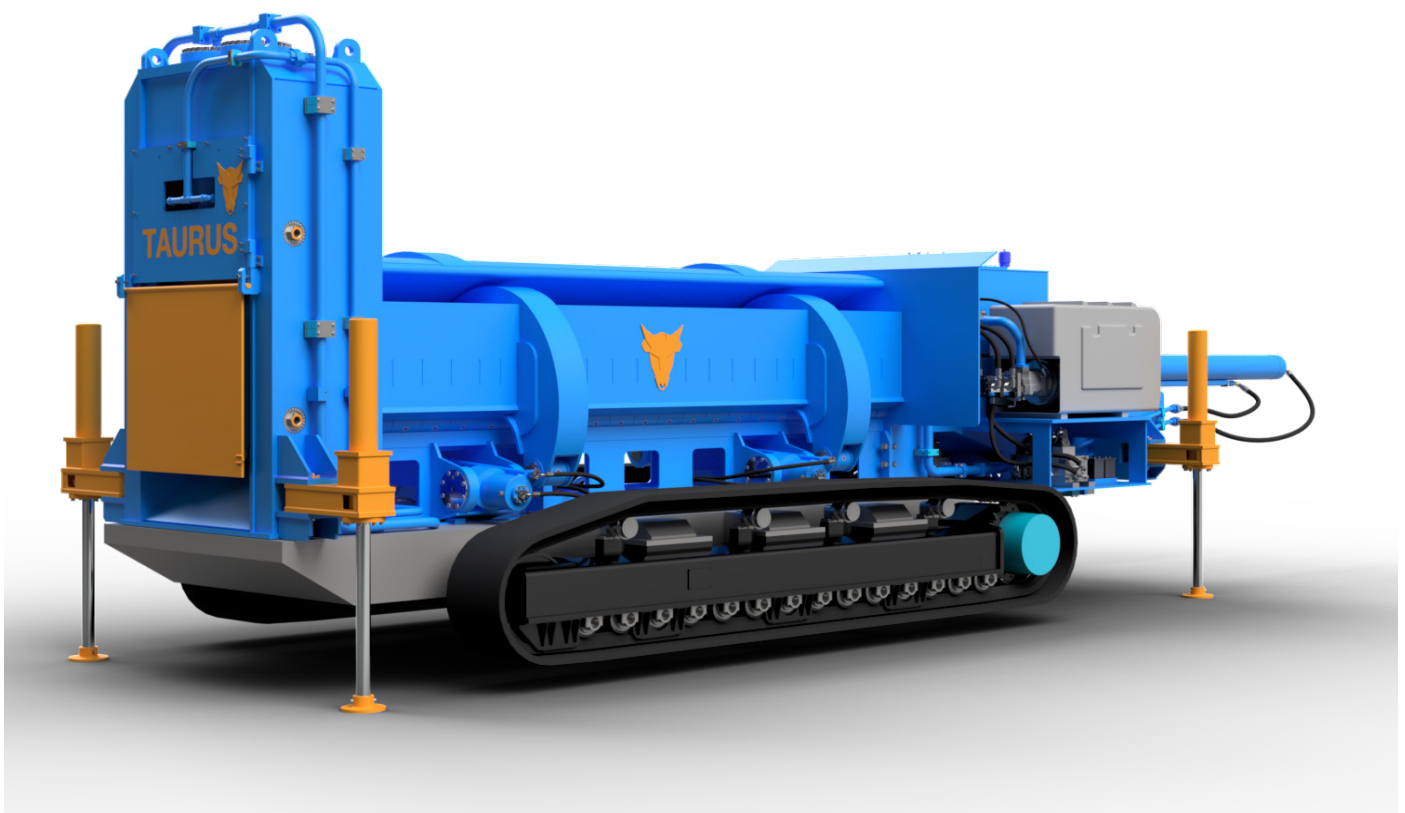

TAURUS

Via Cesare Battisti 77
21020 Daverio (VA-IT)



T. +39 0332947242
info@taurusweb.it
www.taurusweb.it